ANGSEMI

Datasheet

Magnetic Sensor ICs

Omnipolar Detection High Performance Low Power Hall-Effect Sensor IC

AS1800OD

General Description

Using low power CMOS process, the AS1800 is designed for low power, high performance omnipolar detection hall-effect application, such as cover switch, contactless switch, solid state switch and lid close sensor etc battery operation. The hall IC integrated an on-chip hall voltage generator for magnetic sensing, a comparator that amplifiers the hall voltage, a Chopper amplifier, a Schmitt trigger to provide switching hysteresis for noise rejection, and a complementary output.

The total power consumption of AS1800 is typically less than 2.5uA at 2.8V power supply. AS1800 is designed to respond to alternating North and South poles. When the magnetic flux density (B) is larger than operate point (B_{OP}), the output will be turned on (low), the output is held until the magnetic flux density (B) is lower than release point (B_{RP}), then turn off (high).

The device is available in TSOT23-3L&SIP-3L Package is rated over the -40°C to 85°C.

Features

- Input Voltage Range: 1.65V to 5.5V
- Micro-power consumption ideal for battery power applications
- Omnipolar Operation, easy to use as output
- Sensitivity hall sensor
- Low Power CMOS process technology
- Chopper stabilization amplifier stage
- Magnetic Sensitivity (typical)
  B_{OP}=±30Gauss, B_{RP}=±20Gauss
- Good RF noise immunity
- RoHS & Green Compliant
- TSOT23-3L &SIP-3L Packages
- -40℃ to +85 ℃ Temperature Range

Applications

- Smart Meter
- Cover switch
- Contact-less switch

Ordering Information

AS1800ODXXX

Package：
TW:TSOT23-3L
M: SIP-3L

Packing：
R:Tape&Reel
B: Bulk

Temperature Grade：
N: -40°C~85°C
Y: -40°C~125°C


Part Number	B_{OP}(Gauss)	B_{RP} Gauss)	Package Type	Package Qty	Temperature	Eco Plan
AS1800ODTWRN	±30Gauss	±20Gauss	TSOT23-3L	7-in reel 3000pcs/reel	-40～85℃	Green
AS1800ODMBN	±30Gauss	±20Gauss	SIP-3L	1K/Package	-40～85℃	RoHS
AS1800ODTWRY	±30Gauss	±20Gauss	TSOT23-3L	7-in reel 3000pcs/reel	-40～125℃	Green
AS1800ODMBY	±30Gauss	±20Gauss	SIP-3L	1K/Package	-40～125℃	RoHS

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com


■ Marking & Pin Assignment

TSOT23-3L

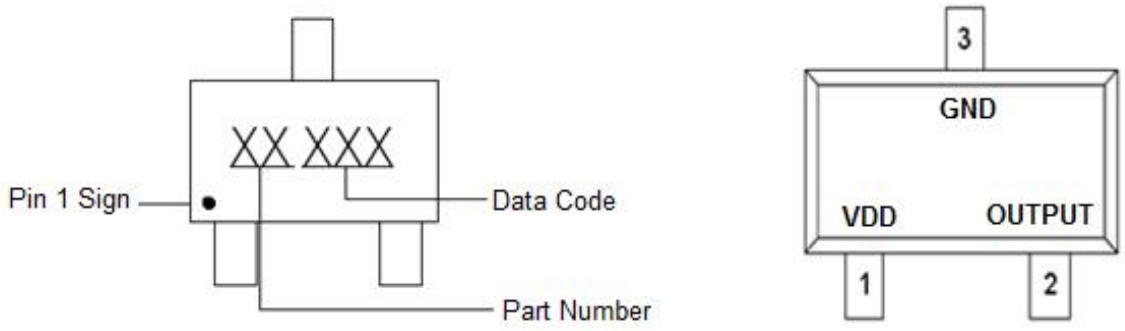

Pin Name	Pin No. TSOT23-3L	I/O	Pin Function
VDD	1	P	Input Power Supply
GND	3	P	Ground
OUTPUT	2	O	Output Pin

SIP-3L

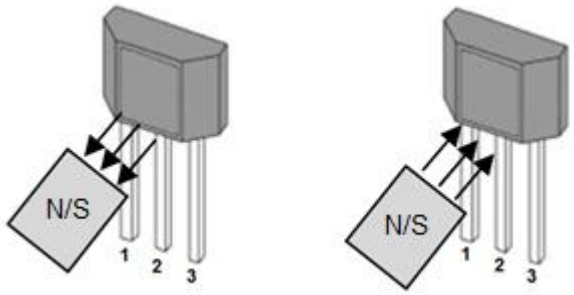

Pin Name	Pin No. SIP-3L	I/O	Pin Function
VDD	1	P	Input Power Supply
GND	2	P	Ground
OUTPUT	3	O	Output Pin.

■ Typical Application Circuit

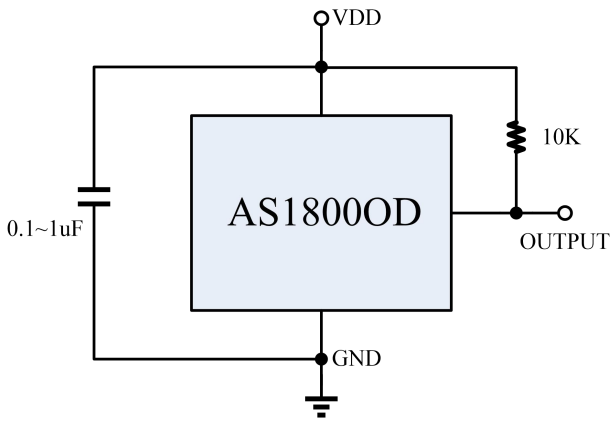


Figure 1, Typical Application Circuit of AS1800OD

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com

■ Block Diagram

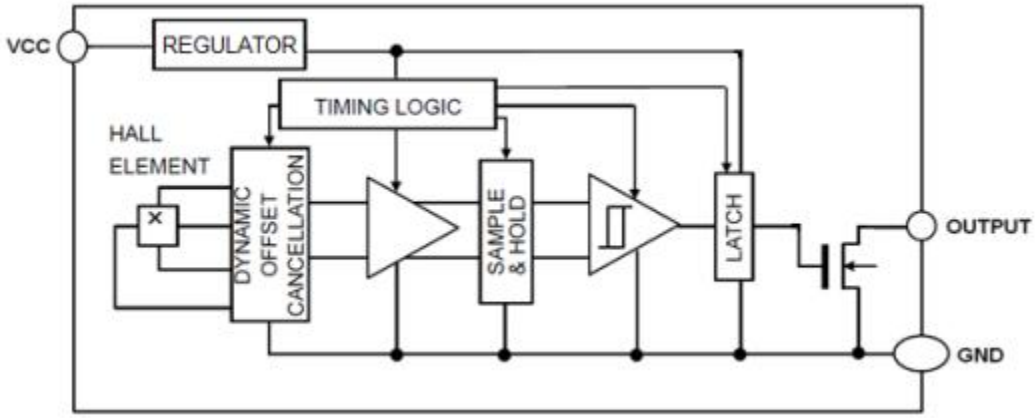


Figure2, Block Diagram of AS1800OD

■ Absolute Maximum Ratings[1] (T_A=25°C, unless otherwise noted)

Parameter		Symbol	Rating	Unit
V_{DD} Pin to GND		V_{DD}	-0.3 to 6	V
Output Pin to GND		V_{OUTPUT}	-0.3 to V_{DD}+0.3	V
Max. Continuous Output Current		I_{OUTMAX}	2.0	mA
Package Power Dissipation	TSOT23-3L/ SIP-3L	P_D	180	mW
ESD (HBM)		ESD	8000	V
Operating Junction Temperature Range		T_{OP}	-40 to +150	℃
Maximum Soldering Temperature (at leads, 10 sec)		T_{LEAD}	300	℃

■ Recommended Operating Conditions[2]

Parameter	Symbol	Rating	Unit
V_{DD} Pin to GND	V_{DD}	1.65 to 5.5	V
Continuous Output Current	I_{OUT}	1.0	mA
Operating Temperature Range	T_{OP}	-40 to +85	℃

Note: 1:Stresses above those listed in absolute maximum ratings may cause permanent damage to the device. Functional operation at conditionsother than the operating conditions specified is not implied. Only one absolute maximum rating should be applied at any one time.

2: The device is not guaranteed to function outside of its operating conditions.

■ Electrical Characteristics

(T_A = -40 to +85℃ unless otherwise noted. Typical values are at T_A= +25℃,V_{DD}= 2.8V) (1mT=10Gauss)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Input Voltage		1.65	3.3	5.5	V
I_{DD}(AVG)	Supply Current	Average supply current, T_A=25℃, V_{DD}=1.8V	-	2.0	-	μA
		Average supply current, T_A=25℃, V_{DD}=4.4V	-	3.0	-	μA
T_{awake}	Awake Time		-	100	-	μs
T_{period}	Period		-	100	-	ms
V_{OL}	Output On Voltage (Low side)	I_{OUT}=-1mA	-0.3	0.1	+0.3	V
Magnetic Para.						
B_{OPS}	Magnetic Operating Point		-	30	40	Gauss
B_{OPN}			-40	-30	-	Gauss
B_{RPS}	Magnetic Release Point		10	20	-	Gauss
B_{RPN}			-	-20	-10	Gauss
B_{HYS}	Hysteresis Window		-	10	-	Gauss

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com


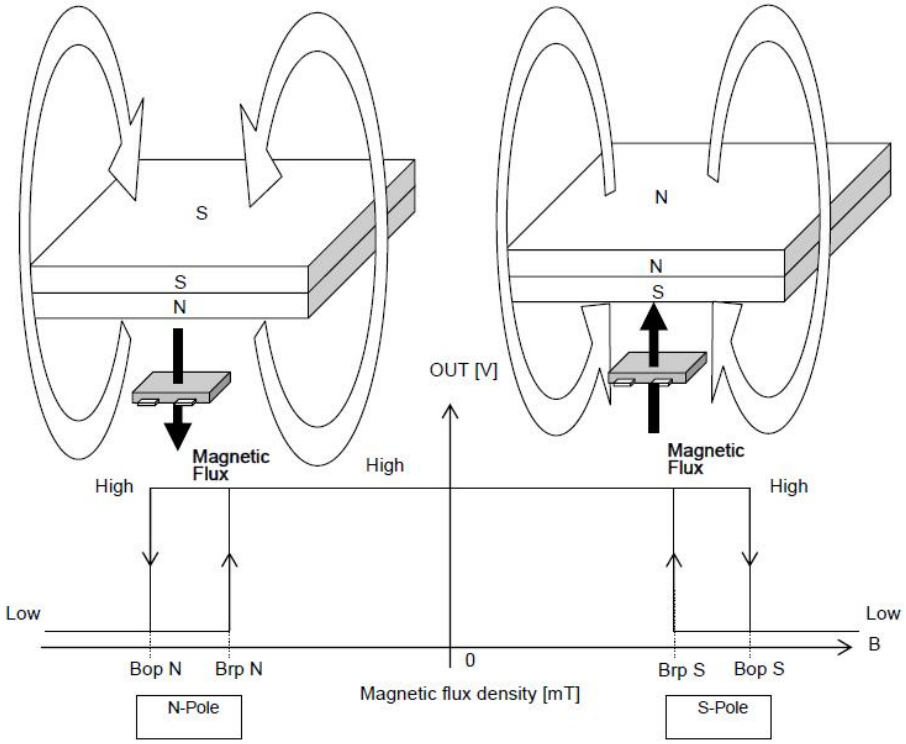


Fig 4, Magnetic Operation Characteristic of AS1800OD

■ Function Description

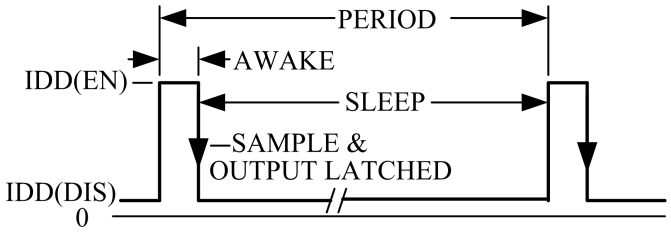

Micro-power Operation

Internal timing circuitry activates the sensor for 100μs and deactivates it for the remainder of the period(100ms). A short "awake" time allows for stabilization prior to the sensor sampling and data latching on the falling edge of the timing pulse. The output during the "sleep" time is latched in the last sampled state. The supply current is not affected by the output state.

Chopper-Stabilized Technique

The Hall element can be considered as a resistor array similar to a Wheatstone bridge. A large portion of the offset is a result of the mismatching of these resistors. These devices use a proprietary dynamic offset cancellation technique, with an internal high-frequency clock to reduce the residual offset voltage of the Hall element that is normally caused by device over-molding, temperature dependencies, and thermal stress. The chopper-stabilizing technique cancels the mismatching of the resistor circuit by changing the direction of the current flowing through the Hall plate using CMOS switches and Hall voltage measurement taps, while maintains the Hall voltage signal that is induced by the external magnetic flux. The signal is then captured by a sample-and-hold circuit and further processed using low-offset bipolar circuitry. This technique produces devices that have an extremely stable quiescent Hall output voltage, are immune to thermal stress, and have precise recover ability after temperature cycling. A relatively high sampling frequency is used for faster signal processing capability can be processed.

Magnetic Field Detection Mechanism

The Hall IC cannot detect magnetic fields that run horizontal to the package top layer. Be certain to configure the Hall IC so that the magnetic field is perpendicular to the top layer.


ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com

Operation

The output of this device switches low (turns on)when a magnetic field perpendicular to the Hall sensor exceeds the operate point B_{OPS} (or is less than B_{OPN}). After turn-on, the output is capable of sinking up to 1mA and the output voltage is V_{OUT}(ON). When the magnetic field is reduced below the release point B_{RPS} (or increased above B_{RPN}), the device outputs witches high (turns off). The difference between the magnetic operates and release points are the hysteresis (Bhys) of the device. This built-in hysteresis allows clean switching of the output even in the presence of external mechanical vibration and electrical noise.

■ Applications:

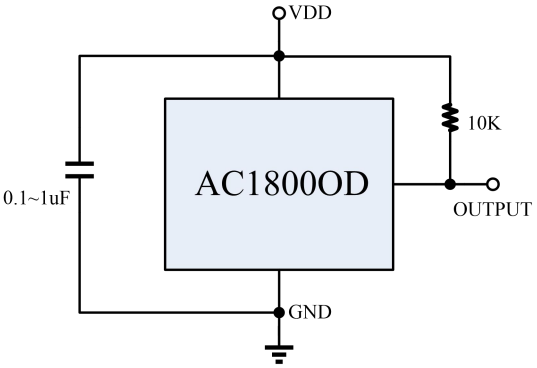

AS1800's pole-independent sensing technique allows for operation with either a north or south poles magnet orientation, enhancing the manufacturability of the device.The state-of-the-art technology provides the same output polarity for either pole face.

C1 serves two purposes: minimizing ripples on the input voltage and enhancing immunity from RF transmission noises within close proximity.Recommended values are between 100nF and 1000nF. The larger the capacitance, the better the noise immunity is for the AS1800.

It is strongly recommended that an external bypass capacitor be connected (in close proximity to the Hall sensor) between the supply and ground of the device to reduce both external noise and noise generated by the chopper-stabilization technique. This is especially true due to the relatively high impedance of battery supplies.The simplest form of magnet that will operate these devices is a bar magnet with either pole near the branded surface of the device.

Thermal Considerations

The maximum IC junction temperature should be restricted to 125°C under normal operating conditions. This restriction limits the power dissipation of the AS1800. Calculate the maximum allowable dissipation, $P_{D(max)}$,and keep the actual dissipation less than or equal to $P_{D(max)}$. The maximum-power-dissipation limit is determined using following equation:

$$P_{D(MAX)} = \frac{125℃ - T_A}{R_{\theta JA}}$$


Where, T_A is the maximum ambient temperature for the application. $R_{\theta JA}$ is the thermal resistance junction-to-ambient given in Power Dissipation Table.

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com

■ Package Information

TSOT23-3L:

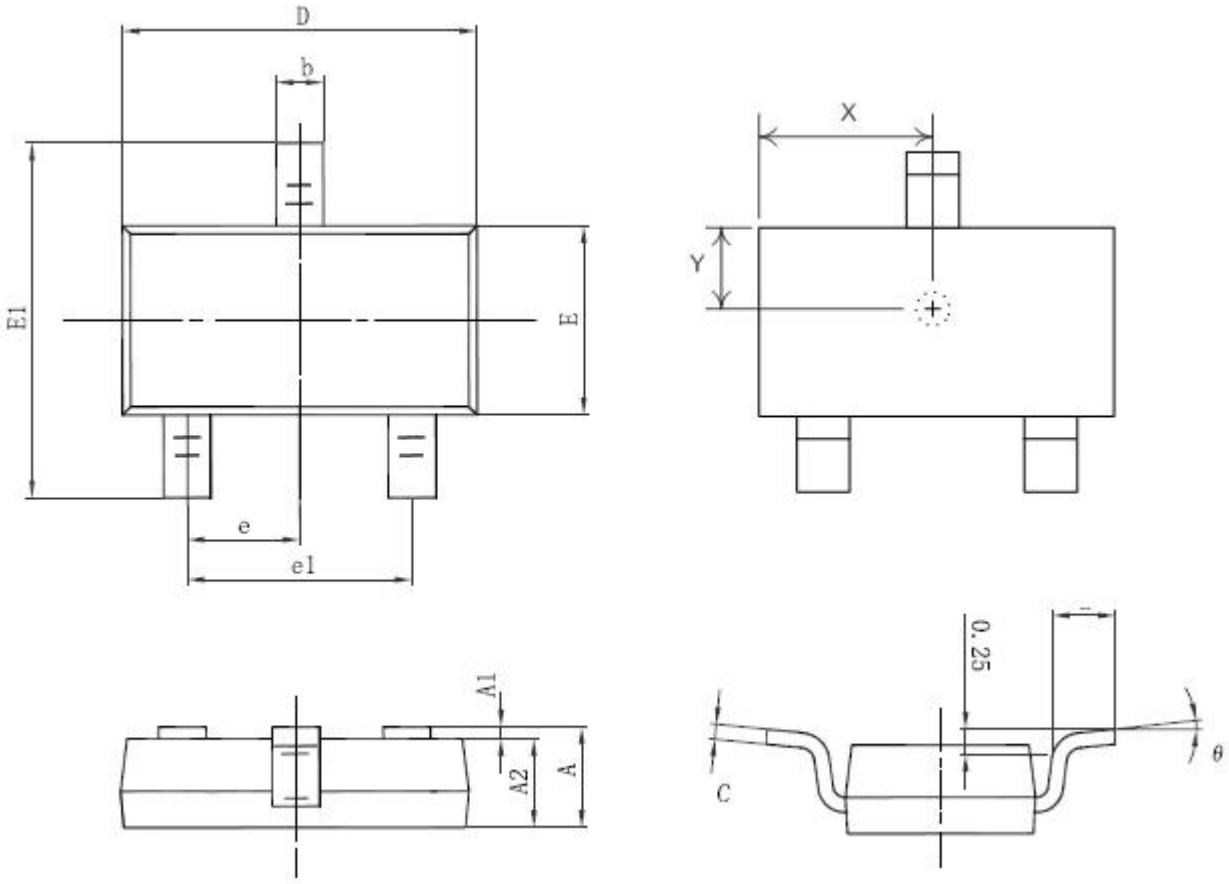


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b	0.350	0.500	0.014	0.020
c	0.080	0.200	0.003	0.008
D	2.820	3.020	0.111	0.119
E	1.600	1.700	0.063	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.900(BSC)		0.075(BSC)	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°
X	1.410	1.510	0.056	0.059
Y	0.800	0.850	0.031	0.033

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com

SIP-3L:

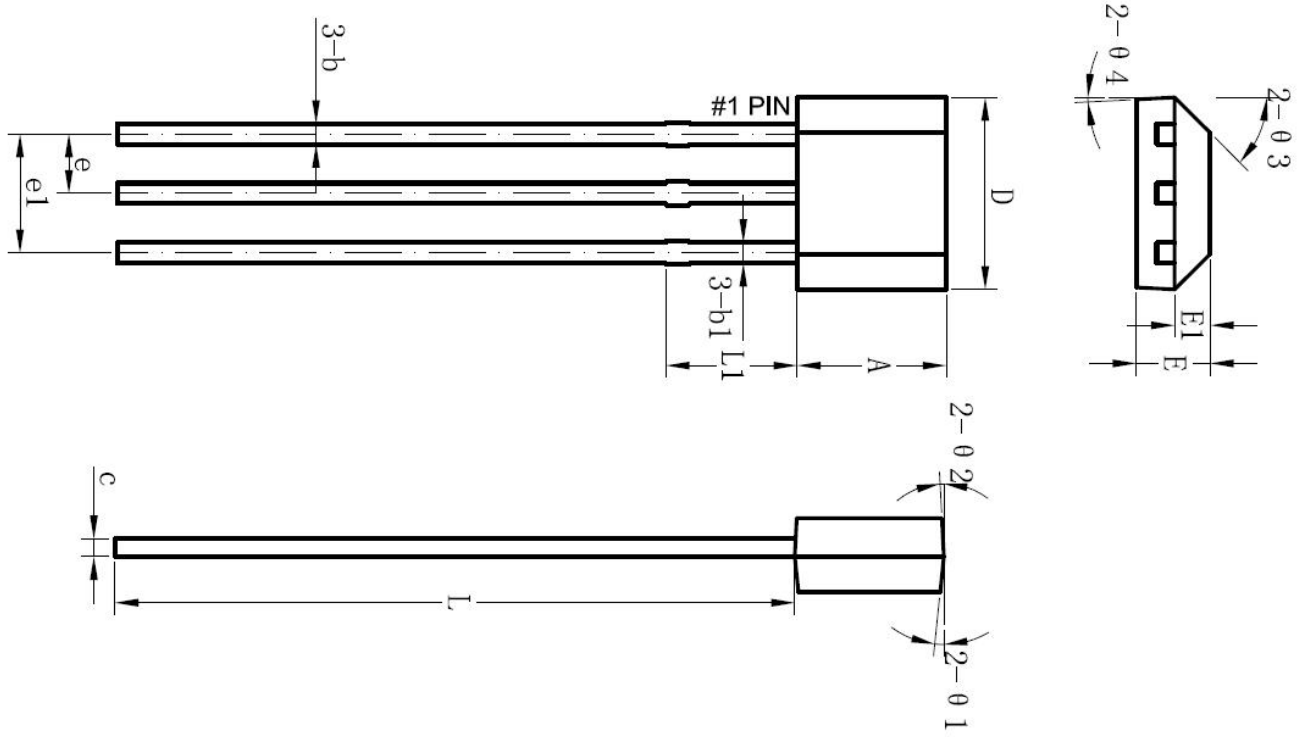


Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.900	3.000	3.100	0.114	0.118	0.122
b	0.350	0.390	0.560	0.014	0.015	0.022
b1	-	0.440	-	-	0.017	-
C	0.360	0.380	0.510	0.014	0.015	0.020
D	3.900	4.000	4.100	0.153	0.157	0.161
E	1.420	1.520	1.620	0.056	0.060	0.064
E1	-	0.750	-	-	0.030	-
E	-	1.270	-	-	0.050	-
e1	-	2.540	-	-	0.100	-
L	13.50	14.50	15.50	0.531	0.571	0.610
L1	-	1.600	-	-	0.063	-
θ1	-	6°	-	-	6°	-
θ2	-	3°	-	-	3°	-
θ3	-	45°	-	-	45°	-
θ4	-	3°	-	-	3°	-


ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com

■ Packing Information

TSOT23-3L:

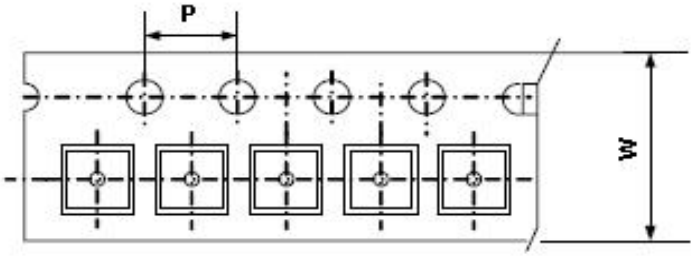

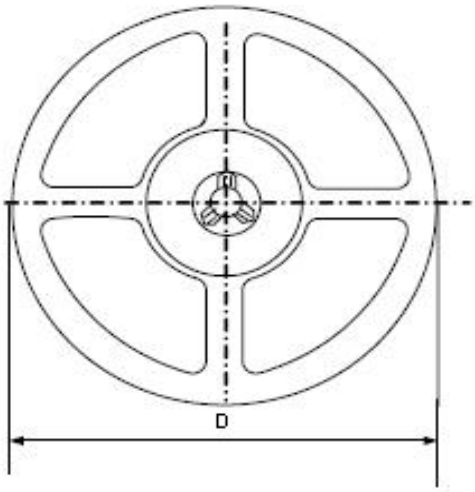

Package Type	Carrier Width(W)	Pitch(P)	Reel Size(D)	Packing Minimum
TSOT23-3L	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	3000pcs

SIP-3L:

1. Packingtype: Bulk
2. Packing minimum: 1000pcs

ANGSEMI Microelectronics Co., Ltd. All rights reserved.

Distributed by SH-MEMS (Shenzhen Shuohong Technology) · Contact: Mr. Li +86 136 3295 6297 · shop.sh-mems.com